

FOFO® | OVER **25** YEARS
EXPERIENCE

— IN HIGH-FREQUENCY PRODUCTS —



Foshan Hongfeng Co.,Ltd


Address: No.4-2 Leqiang Road, Leping Sanshui, Foshan, 528100, Guangdong, China
Tel: 0757-88791710 ext 888 0592-2097262
Email: fofo@fofomedical.com
Mob: +86 13055506651
www.fofomedical.com



www.fofomedical.com

FOFO®

Foshan Hongfeng Co.,Ltd

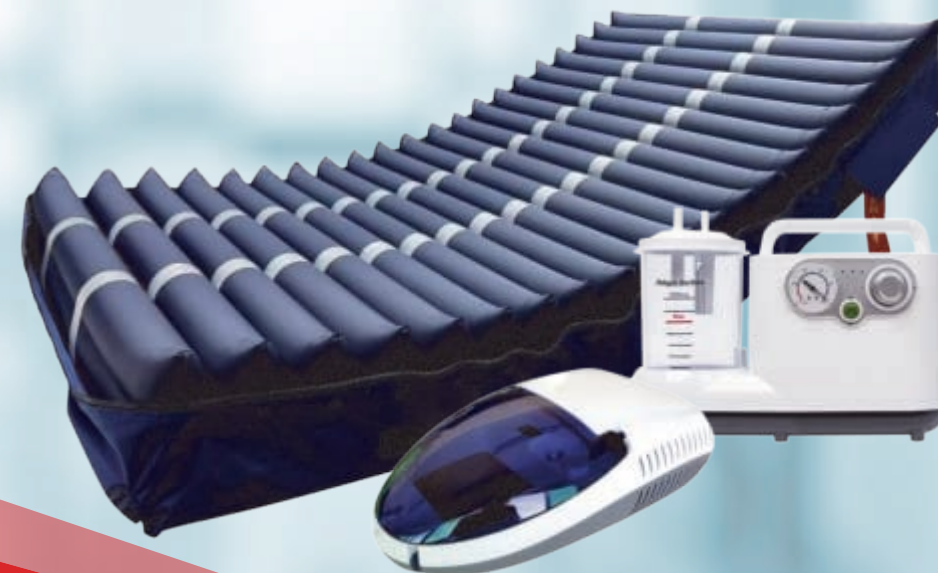

Professional Manufacturer

*Medical Air Mattresses/Nebulizers/
Air Compression Therapy Systems*



Youtube



V.2025



COMPANY INTRODUCTION

Foshan Hongfeng Co., Ltd.

Foshan Hongfeng Co., Ltd mainly produces medical rehabilitation products, specializing in the design and manufacture of air compression therapy machines, compressor nebulizers, suction machines, air cushions and other rehabilitation products. Foshan HongFeng has over 20 years of experience in making high-frequency products. Our high frequency machines are 225KW, and are the most technologically advanced with professional patented designs. There are over 360 workers in the group. Our company has nstrong R & D capabilities, from mold design and manufacturing to software research and development, high-frequency product design and manufacturing are all completed internally, and quality control meets European and American requirements.

Our products have been approved by FDA, 510K, ISO and CE MDR. The sales team's languages include English, Russian, Spanish, French, and Japanese. We have exported to the USA, Europe, Asia, the Middle East, and many other countries in the world. In addition, we have branch factories in Zhangzhou and Xiamen respectively, which enable us to provide customers with diversified product manufacturing and multi-location shipping services. FOFO havs earned a great reputation in our industry amongst our customers and peers. We sincerely hope we can build a stable business relationship with you and welcome you to visit our factory. We guarantee high-quality products, competitive prices, prompt delivery schedules and reliable services.




Xiamen YF medical Co., Ltd.



Zhangzhou YF Medical Co.,Ltd.



CE 0598 FDA ISO13485 510K

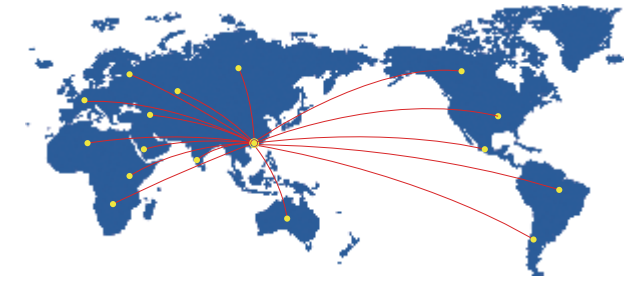

TOP

Air Compression Therapy
Systems Manufacturer

100+

Customers In
100+ Countries Worldwide

25 Years

High-quality
Production Experience

Patented

Automatic Turning Mattress
225KW
HR Machine

30,000

Square Meters Of
Production Area

1,500,000

Exporting 1.5 Million Pieces
Of Air Mattresses in 2025



Contents

Bubble Air Mattress	Page 01 - 04
Tubular Air Mattress	Page 05 - 16
Cushions & Accessories	Page 17- 20
Air Compression Therapy System	Page 21 - 34
Compressor Nebulizer	Page 35 - 46
Phlegm Suction Machine	Page 47 - 48



2.5" Bubble Medical Air Mattress

Low Noise Pump with 18 Months Warranty
SGS Approved
Fire Retardant Taiwan Nanya PVC




Specifications:

Pump	Pad
Item: HF62012	Item: HF6001
Power Supply: 110V/220V, 50-60Hz	Size: 200cm(L) x 90cm(W) x 7.0cm(H) [Standard Size] 190cm(L) x 82cm(W) x 7.0cm(H) [Economic Size]
Air Output: 5-7 liter/min.	130 Bubbles with End Flaps/100 Bubbles
Pressure Range: 30mmHg-110mmHg	Accessories: Repair Kit, Hose
Cycle Time: 10-12mins	Material: Medical Class Taiwan Nanya PVC
Power Consumption: 7W Fuse: 1A	PVC Thickness: 0.3mm
Size: 23.5cm(L) x 13cm(W) x 9.5cm(H)	Color: Beige, Blue
Weight: 0.8kg	Mattress Weight: 1.8-2.1kg
Packing: 20GP 3228pcs/40GP 6400pcs/40HQ 7722pcs	Weight Capacity: 135kg

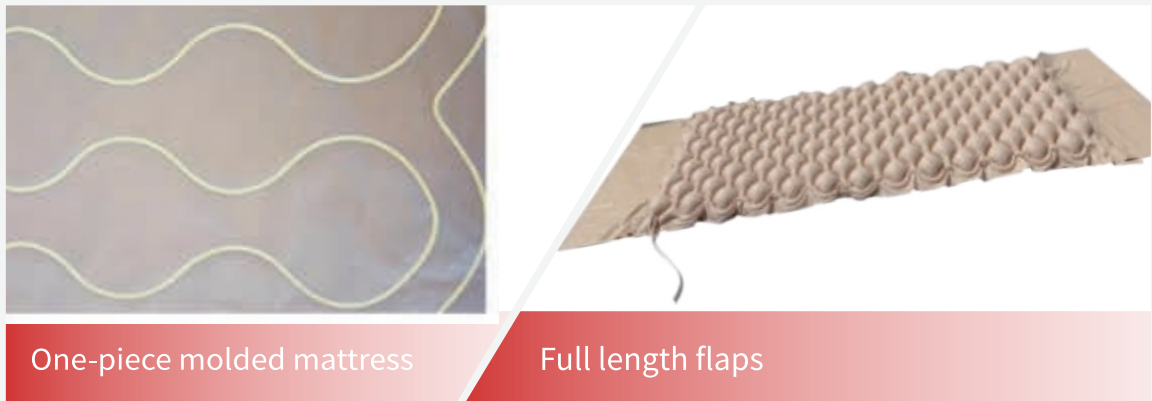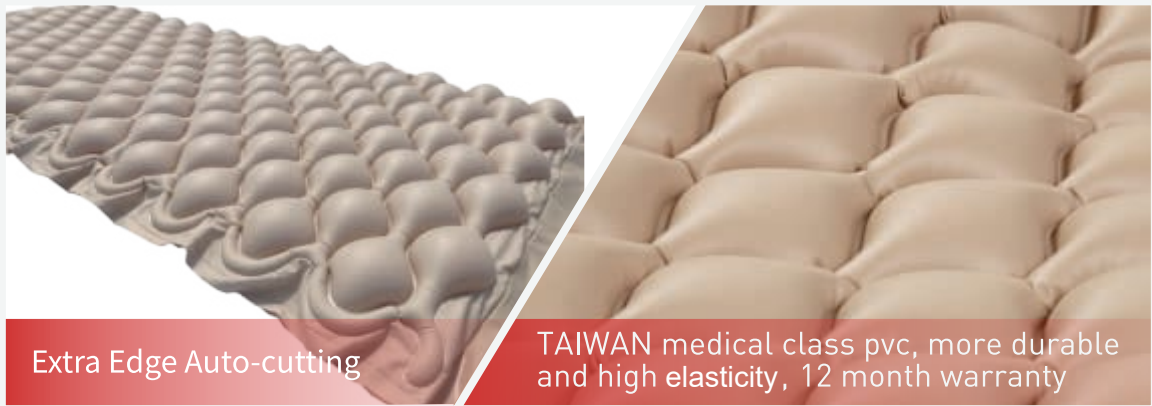

2.5" Ventilation Bubble Air Mattress

Silent Aluminum Motor with 2 Years Warranty
CPC Connector/Outside Fuse/Air Filter Included

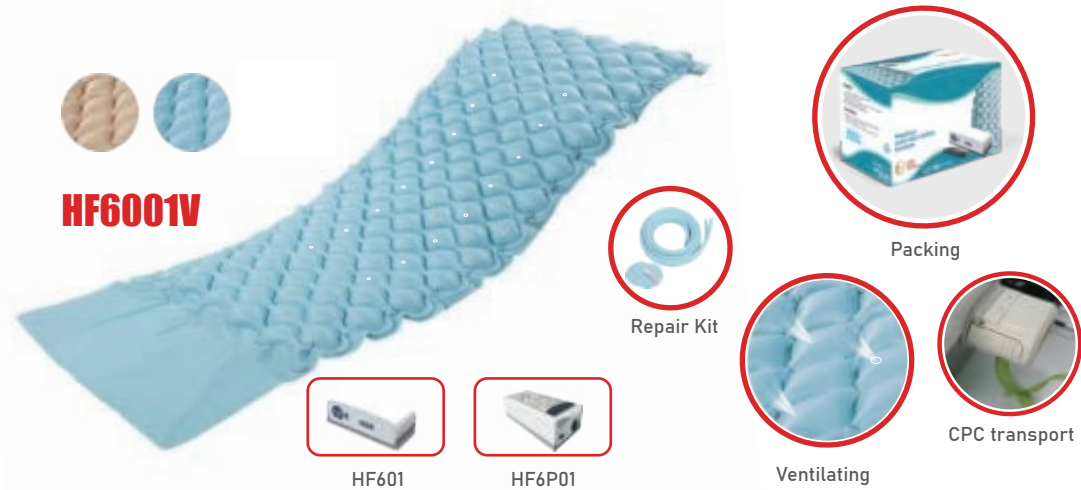

Specifications:

Pump	Pad
Item: HF601	Item: HF6001V
Power Supply: 110V/220V, 50-60Hz	Size: 200cm(L) x 90cm(W) x 7.0cm(H)
Air Output: 6-8 liter/min.	130 Bubble with End Flaps; Ventilating
Pressure Range: 30mmHg-110mmHg	Accessories: Repair Kit, 1.5M Hose
Cycle Time: 10-12mins	Material: Medical Class Taiwan Nanya PVC
Power Consumption: 7W Fuse: 1A	PVC Thickness: 0.3mm
Size: 27.3cm(L) x 13.5cm(W) x 9cm(H)	Color: Beige, Blue
Weight: 1.3kg	Mattress Weight: 1.8-2.1kg
Packing: 20GP 2940pcs/ 40GP 5880pcs/ 40HQ 7114pcs	Weight Capacity: 135kg

Aluminum Pump Compressor



Good ABS Pump Shell



Replaceable Air Filter



External fuse is easy to change



CPC connector for transport



The Aluminum pump compressor has excellent heat control and is extremely silent when running, which extends the lifetime of the pump

One-Piece Tubular Bedsores Prevention Mattress

Low-Noise Pump with 18 Months Warranty

HF6003



HF6003B



HF6003C



HF6003D



HF62012

Specifications:

Pump	Mattress
Item: HF62012	Item: HF6003
Power Supply: 110V/220V, 50-60Hz	Standard Size: 190cm(L) x 87cm(W) x 9.5cm(H)
Air Output: 5-7 liter/min.	240cm x 97cm (mould)
Pressure Range: 30mmHg-110mmHg	Air Cells: PVC
Cycle Time: 10-12mins	AB Zones Alternating Pressure Relief
Power Consumption: 7W Fuse: 1A	Mattress Weight: 2-2.5kg
Size: 23.5cm(L) x 13cm(W) x 9.5cm(H)	Weight Capacity: 145kg
Weight: 0.8kg	Packing: 20GP 3228pcs/40GP 6400pcs/40HQ 7722pcs

Middle Risk Class II Tubular Medical Air Mattress

Top Quality Aluminum Pump 2 Years Warranty
CPC Connector/External Fuse /AB or ABC Alternating Optional

HF6002



- Static/Dynamic modes; Power loss/ low pressure alarm

Specifications:

Pump	Mattress
Item: HF608	Item: HF6002
Power Supply: 110V/220V, 50-60Hz	Standard Size: 200cm(L) x 90cm(W) x 11.5cm(H)
Air Output: 6-8 liter/min.	18 Air Cells
Pressure Range: 30mmHg-110mmHg	Top Cover: Nylon PU with Buttons
Cycle Time: 10-12mins	Air Cells: Medical Class Taiwanese Nylon PVC
Power Consumption: 7W Fuse:1A	Bottom: Welding Tarpaulin
Size: 27.3cm(L) x 13.5cm(W) x 9cm(H)	Mattress Weight : 5.5-6.5kg
Weight: 1.6kg	Weight Capacity: 145kg

5" Fire Retardant PVC 17 Cells Tubular Mattress

Ventilated, Fire Retardant SGS Approved Material ,
100% Waterproof Base Cover/Fully Welding Seams/No Stitching

HF6002-17P



HF62012

Specifications:

Pump	Mattress
Item: HF62012	Item: HF6002-17P
Power Supply: 110V/220V, 50-60Hz	Standard Size: 190cm(L) x 85cm(W) x 11.5cm(H) ;
Air Output: 5-7 liter/min.	17 Air Cells + 1 spare cell
Pressure Range: 30mmHg-110mmHg	Top Cover: Nylon PU with Buttons (optional)
Cycle Time: 10-12mins	Air Cells: Medical Class Taiwanese PVC0.4
Power Consumption: 7W	Bottom: Welding Tarpaulin
Size: 23.5cm(L) x 13cm(W) x 9.5cm(H)	Mattress Weight : 5-5.5 kg
Weight: 0.8kg	Weight Capacity: 145kg

Fire Retardant PVC 22 Cells Tubular Mattress

Ventilated, Fire Retardant SGS Aapproved Material ,
100% Waterproof Base Cover/Fully Welding Seams/No Stitching

HF6002-22P



HF-A

Specifications:

Pump	Mattress
Item: HF-A	Item: HF6002-22P
Power Supply: 110V/220V, 50-60Hz	Standard Size: 186cm(L) x 80cm(W) x 8.5cm(H)
Air Output: 5-7 liter/min.	Air Cells: 22 cells + 1spare cell
Pressure Range: 30mmHg-110mmHg	Top Cover: Nylon PU with Buttons (optional)
Cycle Time: 10-12mins	Air Cells: Medical Class Taiwanese PVC0.4
Power Consumption: 7W	Bottom: Tarpaulin
Size: 22.5cm(L) x 10.5cm(W) x 7.5cm(H)	Mattress Weight : 3.8-4.2kg
Weight: 1.1kg	Weight Capacity: 135kg

Hospital Class II 5" Tubular Air Mattress

Silent Aluminum Pump/Static Model/Alarm
CPC Connector/External Fuse/Filter
AB or ABC Alternating Optional



Specifications:

Pump	Mattress
Item: HF608	Item: HF6005
Power Supply: 110V/220V, 50-60Hz	Standard Size: 80"(L) x 32"-36"(W)
Air Output: 6-8 liter/min.	18 Cells; 200cm(L) x 90cm(W) x 11.5cm(H)
Pressure Range: 30mmHg-110mmHg	Top Cover: Nylon PU/Stretch PU
Cycle Time: 10-12mins	Air Cells: Nylon PVC/TPU
Power Consumption: 7W Fuse:1A	Bottom: Tarpaulin
Size: 27.3cm(L) x 13.5cm(W) x 9cm(H)	Mattress Weight: 5.5-6.5 kg
Weight: 1.6kg	Weight Capacity: 145 kg

Hospital 5"+ 3" Foam Pocket Mattress Replacement

Digital Aluminum Pump System/Auto Pressure Control
100% Waterproof Seam-Sealed Stretch PU Cover



Item:HF6006

- 5" Air Cells with 3" foam pocket, can insert the foam inside
- Mattress Size: 80"(L) X 36"(W) x 5"(H) cell+3" foam 200cm(L) x 90cm(W) x 20.5cm(H)
- Material: Taiwan Nanya Nylon TPU Air Cells Welded Stretch PU Cover, Full Zipper Tarpaulin/Nylon Pu Bottom
- Maximum Weight Limit: 185kg
- Advantages: Waterproof Cover Medical Class TPU Material Pillow Function Bottom Foam Replacement Ventilation Option Easyturn CPR for Rapid Deflation Visual and Audible Alarms for Patient Safety


Item:HF609

- Pump Size: 27.3cm(L) x 13.5cm(W) x 9cm(H)
- Function: Static with Auto-Return, Sitting, Alarm, Lock
- Air Output: 6-8 liter/min
- Pressure Range: 20mmHg-50mmHg
- Cycle Time: 12 mins
- Power Consumption: 7W Fuse: 1A
- AB or ABC Alternating Option
- CPC Connector
- External, Easy Replacement Pump, Air Filters and Fuse
- Automatically Adjusts to the Patients Weight
- Silent Aluminum Compressor Pump at Optimum Support Pressures


8" Low Air Loss Air Mattress Replacement

Low pressure/ Power failure Alarm , Static/ Dynamic
Pressure adjustable

HF6008P-1

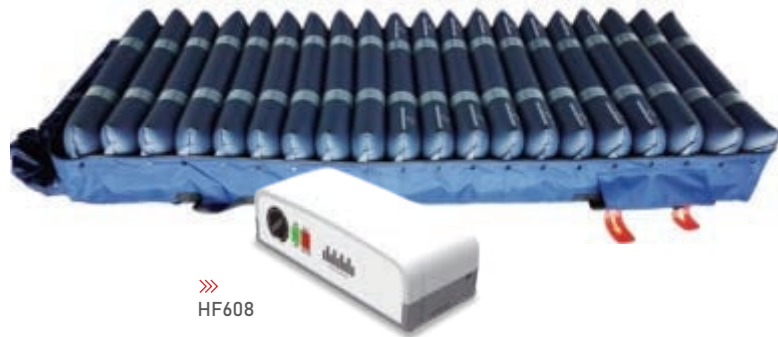

HF608



Item:HF6008P-1

- 8" Full Height Cell, 20 Air Cells, Dimensions: 200cm(L) x 85cm(W) x 20.5cm(H)
- Static bottom for Safety Protection
- PU Top Cover 100% Liquid Proof
- 4 Sided Zipper
- AB/ ABC Alternating Pressure Relief
- Top 1-3 Air Cell Pillow Function
- 4 Side Handles, Bottom 3 Pairs Loops
- 4-11 Air Cells Ventilation
- CPR for Quick Release During Emergency

Item: HF608

- Power Supply: 110V/220V, 50-60Hz
- Air Output: 6-8 liter/min.
- Pressure Range: 30mmHg-110mmHg
- Cycle Time: 10-12mins
- Power Consumption: 7W Fuse:1A
- Size: 27.3cm(L) x 13.5cm(W) x 9cm(H)
- Weight: 1.6kg

Hospital ICU 8" Air Mattress Replacement

Digital Aluminum Pump System/Auto Pressure Control,
Static Mode, Sitting Mode, Alarm/Lock

HF6008



HF609



Item:HF6008

- 8" Full Height Cell, 19 Air Cells, Dimension: 200cm(L) x 80~90cm(W) x 20.5cm(H)
- Static Bottom for Safety Protection
- Fire Retardant Stretch PU Top Cover Welding Seams
- TPU Coated Air Cells
- 4-sided zipper
- Top 1-3 Air Cell Pillow Function
- 4 Side Handles, Bottom 3 Loop Pairs
- 4-11 Air Cells Ventilation
- CPR for Quick Release During Emergency
- Optional: Rectangular Air Cells
- Twisted CPR (optional)
- Individual cell changeable without affecting whole mattress operation (optional)

Item:HF609

- Pump Size: 27.3cm(L) x 13.5cm(W) x 9cm(H)
- Function: Static with Auto-Return, Sitting, Alarm, Lock
- Air Output: 6-8 liter/min
- Pressure Range: 20mmHg-50mmHg
- Cycle Time: 10-12 mins
- Power Consumption: 7W Fuse: 1A
- AB or ABC Alternating Option
- CPC Connector
- External, Easy Replacement Pump, Air Filters and Fuse
- Automatically Adjusts to the Patients Weight
- Silent Aluminum Compressor Pump at Optimum Support Pressures

Bariatric 36-54" AB/ABC Alternating Pressure Mattress

Dual Pump for Heavy Patient Support up to 450kgs
Auto Weight Comfort Mode

HF6008/HF806



HF806



Touch Panel

MATTRESS SIZE & RECOMMENDED MAX PATIENT WEIGHT

Model	Width	Recommended Max Patient Weight
Standard	36"	450 lbs / 200 kg
Bariatric S	42"	600 lbs / 270 kg
Bariatric L	48"	750 lbs / 350 kg
Bariatric XL	54"	1000 lbs / 450 kg

Item: HF6008

- 9" Full Height Cell, 21 Air Cells, Dimensions: 200cm(L) x90~138cm(W) x 23.5cm(H)
- Foam Base for Safety Protection
- PU Top Cover
- Comfortable Rectangular Air Cells(Optional)
- 4-Sided Zipper
- AB Alternating Pressure Relief up to 67% Instead of 50%(Optional)
- Top 1-3 Air Cell Pillow Function
- 4 Side Handles, Bottom 3 loop Pairs
- CPR for Quick Release During Emergency
- Weight Capacity: 280-450kgs

Item:HF806

- ABC Alternating with Dual Air Pump
- Power Failure and Low Pressure Visible / Audio Alarm
- Lock/Mute Function
- Auto-Weight Control
- Static Nursing Mode, 30 mins back to Alternating
- Sitting Position Provides More Support
- CPC Quick Connector and Detachable 4M Wire
- Dimensions: 34.5cm(L) x 19cm(W) x 14.5cm(H)



8" Turning Mattress for Multi-Functional Automatic Rotation/Dynamic

6 Zones/15L Blower Quick Inflating

HF805



FEATURES AND BENEFITS

- Lateral Rotation Angle Adjustable: 15°and 45°
- 21cm High Cells for Professional Hospital Environments
- Raised Side Perimeter Air Bolsters Mitigate Accidental Patient Roll-outs, and Reduce the Risk of Entrapment. (Rounded and Triangular Rails Optional)
- TPU Material
- Remote Control, Simple Operation and Wide Applicability
- Audio/Visual Low Pressure Alarm
- Audio/Visual Low Pressure Alarm
- Static Function for Safe and Easy Transfer.
- LED Display Full Touch Panel
- 12/18/24mins Alternating Cycle.

Item:HF805

- Pump Size: 28cm(L) x 10cm(W) x 16.5cm(H)
- Minimum Weight Limit: No Minimum
- Maximum Weight Limit: 180kg
- Mattress Size: 200cm(L) x 90cm(W) x 21cm(H)
- Material: TPU Film / Nylon TPU for Air Cells, Stretch PVC
- Cover, Bottom Tarpaulin/Nylon PU
- Alarm : power failure / air leak
- Alternating and Static function
- Aluminium pump X 1 , Blower pump X1




5" Turning Mattress for Anti-Bedsore & Pressure Ulcer Prevention

6 Zones



HF808



FEATURES AND BENEFITS

- 6 Independent Automatic Areas. Combines Head up, Feet up, Lateral Rotation, Low Air Loss and Alternating Pressure in One Mattress System.
- 11.5cm Cell Height, Compact Size, Quick and Easy Installation for Simpler Environments
- TPU Material
- Remote Control, Simple Operation and Wide Applicability
- Audio/Visual Low Pressure Alarm
- Static Function for Safe and Easy Transfer.
- LED Display Full Touch Panel
- 12/18/24mins Alternating Cycle.

Item:HF808 5"

- Pump Size: 28cm(L) x 10cm(W) x 16.5cm(H)
- Minimum Weight Limit: No Minimum
- Maximum Weight Limit: 135-145kg
- Mattress Size: 200cm(L) x 90cm(W) x 11.5cm(H)
- Material: TPU Film / Nylon TPU for Air Cells, Stretch PU Cover, Bottom Tarpaulin




Alternating Pressure Air Pump

CE FDA FC EMC ISO13485

Model	HF62012	HF-A	HF605	HF602	HF603	HF6P01
Size	23.5*13*9.5cm	22.5*10.5*7.5cm	20.1*10.4*7.2cm	23.5*13*9.5cm	23.5*12*9.5cm	27.5*12*10cm
Weight	0.8kg	0.8kg	0.8kg	0.8kg	0.8kg	1.1kg
Alternate Mode	AB	AB	AB	AB	AB	AB
Air Output	5-7 L/min	5-7 L/min	5-7 L/min	5-7 L/min	5-7 L/min	6-8 L/min
Air Pump	Plastic	Plastic	Plastic	Plastic	Plastic	Aluminum
Static Mode	--	--	--	--	--	Optional

Model	HF601/ HF608	HF609	HF800	HF808	HF806	HF805
Size	27.3*13.5*9cm	27.3*13.5*9cm	27.3*13.5*9cm	28*10*16.5cm	34.5*19*14.5cm	34.5*19*14.5cm
Weight	1.3kg	1.3kg	1.3kg	1.67kg	2.2kg	2.2kg
Alternate Mode	AB/ABC/AB-D	AB/ABC/AB-D	AB/ABC/AB-D	AB/ABC/AB-D; R	AB/ABC/AB-D	AB/ABC/AB-D
Air Output	6-8 L/min	6-8 L/min	6-8 L/min	6-8 L/min	10-12 L/min	5-7L/min , 15L/min
Air Pump	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum *2	Aluminum X1, Blower X1
Static Mode	--	yes	yes	yes	yes	yes
Quick Connector	yes	yes	yes	yes	yes	yes
Alarm	--	yes	yes	yes	yes	yes
Auto KG/Cycle Time	--	yes	yes	yes	yes	yes
Seat Inflate Mode	--	yes	yes	yes	yes	yes

Portable Dynamic APP Cushion Li-ion Battery



HF2002



A
Plug-in



B
Rechargeable

Provides extra mobility for 12 hours per day

Specifications:

- Dimensions: 45(L)x45(W)x10(H)cm
- Static/Alternating Mode
- Weight Capacity: 120kg
- Cushion - TPU, Cover - Stretch PU
- Low Pressure and Battery Alarm
- Weight: 2kg
- 3 Cycle Times
- 5 Comfort Settings



HF2006

Seat Cushion

- Material: 0.4mm Medical Class PVC Fabric
- Size: 45x45cm
- Packing info: 54(L)x29(W)x22(H)cm, 15.2KG, 100PCS/CTN



HF2005

Wound Pad

- Material: PVC Flocking
- Size: Diameter 45cm/40cm
- Packing info: 50(L)x30(W)x 40(H)cm/100pcs

Bedsore Prevention Air Cushion



HF2007/2008



HF2003



HF2001

Size: 42x42cm
Material: Silicon/Rubber

Size: 42x42cm / 46x40cm
46x46cm / 50x46cm
Material: TPU/PVC
Max weight: 135Kg
Net weight: 0.29kg
Packing: 50x50x62cm, 20PCS/CTN


Size: 42x42cm / 46x40cm
46x46cm / 50x46cm

- Composed of air cells; can adjust to body shape according to the sitting posture.
- Keeps the hips at a sufficient distance from the bottom of the cushion to protect the skin and soft tissues.
- Improves air circulation and better disperses heat.




The Static Bedsore Prevention Mattress

HF2009A

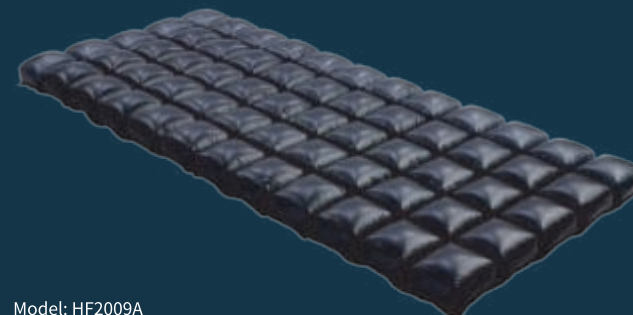

Model: HF2009A
Size: 205x90 x12cm
Weight: 3.5KG
Material: TPU/PVC
Carton size: 51x37x49cm, 2PCS/CTN

HF2009B

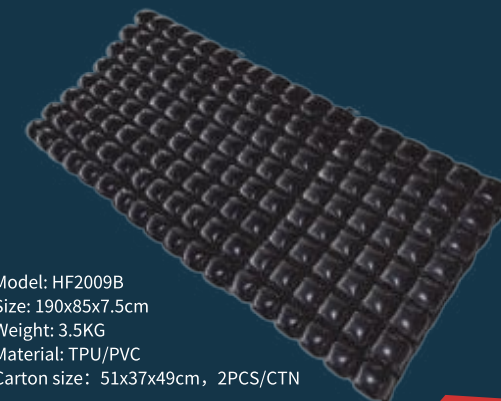

Model: HF2009B
Size: 190x85x7.5cm
Weight: 3.5KG
Material: TPU/PVC
Carton size: 51x37x49cm, 2PCS/CTN

Air Transfer Mattress, Single-Patient Use

Products are Made with High-Elastic PVC Making Them Safe and Beneficial to Leave Under Patients for All Day Care That Supports Pressure Injury Prevention.

Mattress

- Large Size: 222x100cm
- Small Size: 222x89cm
- PVC Thickness: 0.4mm



HF6200

Big Valve

Hand Pump

Chair/Wheelchair Seat



HF6201

- Size: 99x63cm
- Box Size: 54x29x22cm
- 50 pieces/box
- Gross Weight: 19.1 kg
- Net Weight: 18.55 kg

Inflatable Bath/Hair Basin

HF2101



Inflatable Bath Basin

- Material: PVC 0.4mm
- Accessories: Electric Pump, Water Hose
- Size: 190x90x22cm
- Electric Pump

HF2100



Shower bag optional


Inflatable Hair Washing Basin

- Material: PVC 0.4mm
- Accessories: Pump, Water Hose, Clips, Color Box
- Size: 23x62x53cm
- Color Box Size: 22x18x11cm
- Hand Pump

Medical Water Mattress

HF6100

- Air frame + 3 Independent Baffles
- Material: Thickness +K75
- Size of Outer Frame : 200x93x11.5cm
- Size of Each Element : 69x60x11.5cm
- Weight: 3.5kg
- Packing : 1 set in PE bags, 4 sets in Outer Carton
- Accessories: Hand Pump, Water Hose, Repair Kit

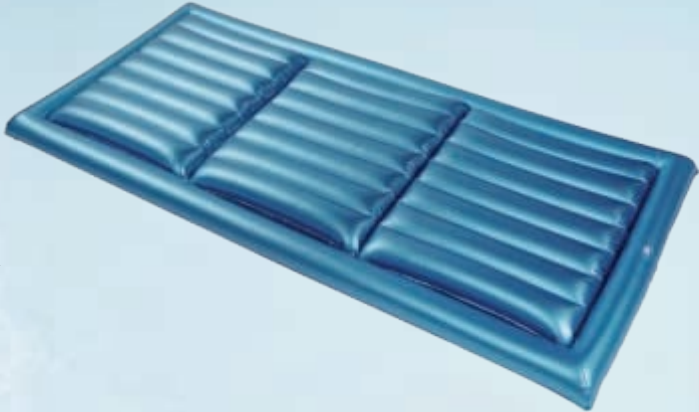

HF6101



- Material: PVC
- One Piece Type
- Color Box Size: 30x5x38cm
- Packing Size: 34x31x40cm
- QTY/CTN: 6 PCS PER CTN
- Size: 180x86x12cm

Air Compression Therapy System Cuffs




APPLICATION

Lymphedema treatment typically includes a few methods and compression devices is one of them. The pneumatic compression pump provides on-and-off pressure to keep fluid moving through lymph vessels and veins so it doesn't build up in arms, legs and other parts of your body. The device works by connecting the pump to a sleeve that wraps around affected areas. The pump drives a regular cycle of pressure that inflates and deflates the sleeve. Compression pumps may also reduce complications of lymphedema.

How can air compression therapy systems help ?


- ✓ Improving blood and lymph circulation.
- ✓ Pushing the residual lymph towards the lymph nodes.
- ✓ Removal of lymphatic edema and exudates.
- ✓ Improving the nutrition and oxygenation of the skin and other tissues.



Sleeve	Description	Size
Leg	Leg Cuff M	91*65cm
	Leg Cuff L	100*70cm
	Leg Cuff XL	110*70cm Overlapping
	Leg Cuff XXXL	125*76cm Overlapping
Arm	Arm Cuff M	87*51cm
	Arm Cuff L	90*60cm Overlapping
Waist	Waist Cuff M	120*37cm
	Waist Cuff L	130*37cm Overlapping
Trousers	Short Pants (4,6,8 Chambers)	80*76cm
	Long Pants (6,8 Chambers)	142*85cm
Vest/cloth	Vest (6,8 Chambers)	78*72cm
Jacket	Double Arm/Shoulder	133*37 (pair)cm
hand	Left/Right	M/L/XL



ABC DEF 6 Modes

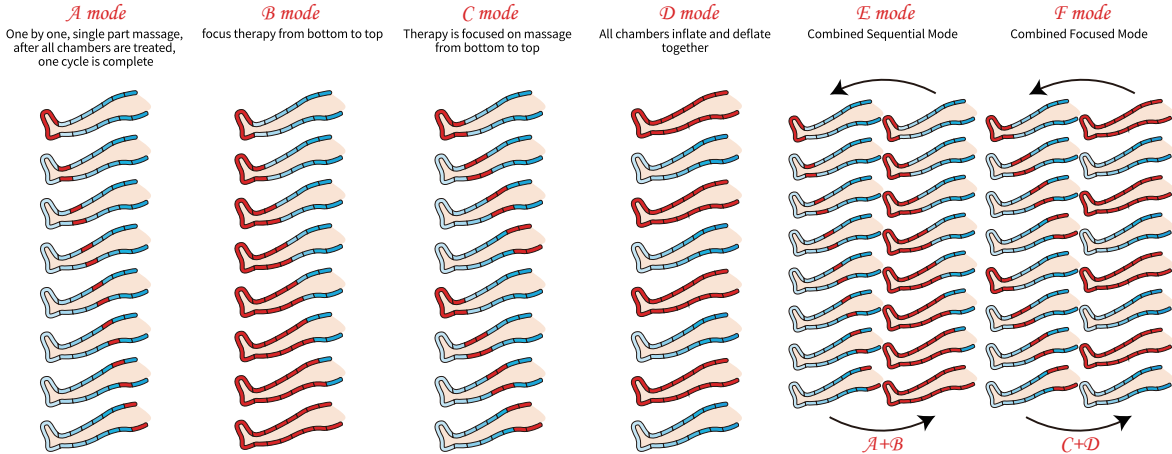

NEW

Wireless Magnetic Portable Air Compression Boots for Travel

- System consists of a detachable electronic main unit and garments.
- The controller is attached to the magnetic panel and can be removed.
- Allows multi-use of attaching the main unit to legs, arms and waists,pants.

Model	FO3003D
Device Size	12.5x7x4.8cm
Massage Modes	4 modes
Pressure Range	80 ~ 250 mmHg
Treatment Time	10 ~ 60 mins
Chambers	5
Input	DC5V/3A/2600mA
Cuffs Compatibility	Leg, Arm, Waist, Long Pants

FO3003D



Premium

LCD touch screen Air Compression Therapy System with Bluetooth



SPECIFICATIONS

- Multi-Lingual Device
- Demo Videos
- Power Consumption: 30W/40VA
- Device Size: 25cm*12cm*9cm
- Massage Mode: 6 modes
- Pressure Range: 30~270 mmHg
- Treatment Time: 10~60 mins
- Input: DC 15V/5200mA
- Each Chamber can be Partially Skipped
- Can use as USB Mobile Phone Charger
- Weight: 1.4 kg



FO3002E



App Optional



7-inch large screen



APP synchronization control



Pre set cold therapy mode



2.5-4 hours of battery life



USB battery external discharge



Habitual memory

WiFi and Bluetooth Connectable/ App Control


Built-in Video Instructions

Full-Body Garments


Intermittent Pressure Compression Device (IPC)

4/6/8 Chambers Medical CE FDA 510K

- Powerful Medical-Grade Air Pump Provides 250mmHg Pressure
- Upgraded A-F 6 Modes
- Chambers Optional Function skips sections which you don't want to compress
- Sleeves with overlapping design provide more comfort
- Extension Straps for wider Sleeves
- Easy-Split Designs for 2-4 Sleeves parallel use

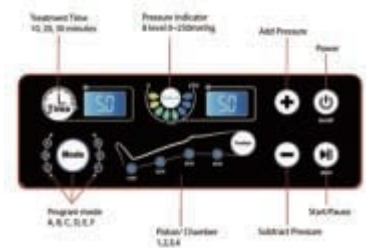

Remote control distance <5 meters



FO3001-2



FO3001

Specifications:

Pump	Sleeves	
Item: FO3001, FO3001-2	Leg(4/6/8 Chambers)	M 91*65cm / L 100*70cm
Power Supply: 110V/220V/50-60Hz		XL 110*70cm overlapping / XXXL 125*76cm overlapping
Air Output: 15-20 liter/min.	Arm(4/6/8 Chambers)	M 87*51cm / L 90*60cm overlapping
Pressure Range:30mmHg - 250 mmHg	Waist(4/6/8 Chambers)	M 120*37cm / L 130*37cm overlapping
Time: 10-60 min.	Long Pants (6/8 Chambers)	142*85cm / 142*76cm overlapping
Power Consumption: 45VA	Short Pants (4/6/8 Chambers)	82*77cm
Size: 24cm(L) x 20cm(W) x 11cm(H)	Jacket (6/8 Chambers)	102*73cm
Weight: 2.45kg	Vest(6/8 Chambers)	78*72cm

Sequential Compression Device (SCD)


4/6/8 Chambers MDR CE 510K

- Medical CE, FDA510K ClassII
- Li-ion Battery 2600mA
- Powerful Medical-Grade Air Pump Provides 250mmHg Pressure
- Upgraded A-E 5 Modes Instead of the old Two-Modes Massage and Therapy

FO3002



4.3" Screen Air Compression Therapy With Li-ion Battery

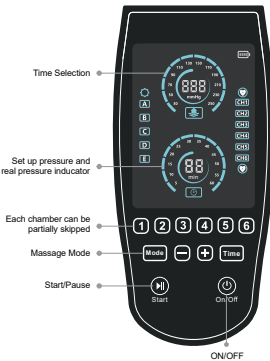

FO3002-1

Specifications:

Pump	Sleeves	
Item: FO3002 / FO3002-1	Leg(4/6/8 Chambers)	M 91*65cm / L 100*70cm
Power Supply: 100-220V/12V/2600mAH		XL 110*70cm overlapping / XXXL 125*76cm overlapping
Air Output: 15-20 liter/min.	Arm(4/6/8 Chambers)	M 87*51cm / L 90*60cm overlapping
Pressure Range:30mmHg - 250 mmHg	Waist(4/6/8 Chambers)	M 120*37cm / L 130*37cm overlapping
Time: 10-60 min.	Long Pants (6/8 Chambers)	142*85cm / 142*76cm overlapping
Power Consumption: 65VA	Short Pants (4/6/8 Chambers)	82*77cm
Size: 25cm(L) x 12cm(W) x 9cm(H)	Jacket (6/8 Chambers)	102*73cm
Weight: 1-1.6 kg	Vest(6/8 Chambers)	78*72cm

NEW

Premium 12 Chambers Air Compression Therapy System

Segmented Pressure Control:

- Each chamber can have the pressure adjusted, with sections from the ankle to the thigh.
- Creates a gradient pressure from the distal end to the proximal end.
- Promotes unidirectional flow of blood and lymph, and prevents stasis.

Dynamic Compression Mode:

- The airbags inflate and expand in sequence, creating a wavy compression.
- Similar to the effect of a "muscle pump".
- Accelerates the return of venous blood and alleviates swelling in the lower limbs.

F03012

Leg



Specifications:

Pump	
Item No.	F03012
Name	12-chambers lymphedema compression massage machine / compression therapy boots
Control Way	LED touch keypad and remote controller
Machine Size	30.2 × 25.4 × 15.8 cm
Pressure Range	30-250 mmHg
Treating Time	10-60 minutes (electronically adjustable in steps)
Programs	8 modes: A/B/C/D/E/F/G/H
Intensive/Skip Care	12 chambers can be individually switched on/off to target specific muscles, areas, or avoid injured/surgical sites

NEW

Hand-held 6 Chambered legs Compression Therapy

- F03003C is individual valves to the 6 chambers for legs with 5 modes. Max pressure 250mmHg perfect performance for compression.
- Portable handy 4 and 6 Chambers device easy for carry and storage.
- Small individual box is good for online shops.

Model	F03003C
Device Size	23.8*8.8*5cm
Weight	0.66KG
Chamber	4 and 6 chambersleeves
Modes	A/B/C/D/E
Pressure	30-250mmHg
Power Consumption	DC12V/2A
Maximum Power	30W
Noise Level	Below 55 dBA
Certificates	CE

F03003C



Heating+Compression therapy

Pressurization and Heating Simultaneously Accelerate Blood Flow



F03001M-1/ F03002-2

SPECIFICATIONS

- Size: 23.5 x24x10.5cm
- Machine Voltage: AC 220V
- Power: 30W/40VA
- Weight: 2.2KG
- Heating Module voltage: DC 15V
- Feeling Temperature: approx. 40°C



High Quality Air Compressor



Heated Leg Straps



Targeted Therapy for Foot, Calf, Knee or Thigh



Effective for Lymphatic Edema



40°C Max

Cryo+Compression Therapy

Full Leg Cooling and Compression

SPECIFICATIONS

- Name: Cryo+Compression Therapy
- Dimension: 290*270*285mm
- Weight: 3.1KG
- Water Flow: 0.85L/MIN
- Volume: 6.5L
- Temperature: 5°C

YF-101



Lower cuff Air Massager with heating

- F03003B is 3 chambers for legs. Max pressure 160mmHg .
- Small individual box is good for online shops.

SPECIFICATIONS

- Device Size: 20*6*4.5cm
- Weight: 0.65KG
- Chamber: 3 chamber sleeves
- Modes: F1/F2/F3/F4
- Pressure: 60-160mmHg
- Power Consumption: DC12V/1.5A
- Maximum Power: 14W
- Noise Level: Below 55 dBA
- Characteristics: Heating Pressure



F03003B



Portable DVT/Wireless Calf Massager

SPECIFICATIONS

- **DVT:** Pressure 10-60mmhg , Sequential Compression, Intermittent Time 24/48/60 Sec, Type-c
- **Massager:** 3 Modes And Heating, Pressure 60/80/99mmhg, Heating Temperature 45°C-55°C
- Main Device Size: 14*7*0.25cm
- Input Voltage: DC 5V/2000 mA
- Carton Box: 380*340*380mm; 10pcs per carton; 5800pcs for 20ft, 13870 for 40HQ
- Certificates: ISO, FDA, Massage CE


F03003



Back stretching pad

Automatic Back Stretching Air Pad, Lumbar Spine Relaxer, Stretcher, Waist Tensioner, Loose Top, Easy-Roll up Mat, Back Exercises
Single pad 6/8 zones fit all compression device in market

F03M



Air Compression Therapy Pump

4/6/8 Chambers Available,
Massage A / Therapy B mode optional

Plug-in

F03001M (Manual)



Easy Operation



Effective Lymphatic Edema

Specifications :

Device Size: 24cm*20cm*11cm
Mode Massage: A or Therapy B
Pressure Range: 30~250 mmHg
Treatment Time: 10~30 mins/always on
Power Consumption: 65VA

B Therapy Mode Sequential compression



F03001BM (Manual)



Convenient One-Touch Sleeve



Use Various Cuffs According to User's Area

Specifications :

Device Size: 24cm*20cm*12cm
Mode Massage: A or Therapy B
Pressure Range: 30~250 mmHg
Treatment Time: 10~30 mins/always on
Power Consumption: 65VA

A Massage Mode



F03006 (Manual)



Convenient Handle Design

Home use

Specifications :

Device Size: 25cm*22cm*11cm
Mode Massage: A or Therapy B
Pressure Range: 30~250 mmHg
Treatment Time: 10~30 mins/always on
Power Consumption: 35VA

F03001

(Medical CE FDA510K)



Specifications :

Device Size: 24cm*20cm*11cm
Massage Mode: 6 modes
Pressure Range: 30 ~ 250 mmHg
Treatment Time: 10~ 60 mins
Power Consumption: 45VA
Each Chamber can be Partially Skipped
4,6,8 Chambers Available

F03008

(Medical FDA510K)



Specifications :

Device Size: 25cm*22cm*11cm
Massage Mode: 3 modes
Pressure Range: 30~250 mmHg
Treatment Time: 10~60 mins
Power Consumption: 65VA
Each Chamber can be Partially Skipped
4,6 Chambers Available



Use Durable Domestic Air Motors



6 Modes (Circulation & Massage)



Use Various Cuffs According to User's Area



A Choice of Sleeve



Set Pressure and Time



Skip Function



Effective Lymphatic Edema



Color Option

F03001B



Specifications :

Device Size: 24cm*20cm*12cm
Massage Mode: 6 modes
Pressure Range: 30 ~ 250 mmHg
Treatment Time: 10~ 60 mins
Power Consumption: 65VA
Each Chamber can be Partially Skipped
4,6,8 Chambers Available

F03001C



Specifications :

Device Size: 26.5cm*15.5cm*31cm
Massage Mode: 6 modes
Pressure Range: 30 ~ 250 mmHg
Treatment Time: 10~ 60 mins
Power Consumption: 65VA
Each Chamber can be Partially Skipped

With Li-ion Battery

F03002

(Medical CE FDA510K)



Specifications :

Device Size: 25cm*12cm*9cm
Massage Mode: 5 modes
Pressure Range: 30~250 mmHg
Treatment Time: 10~60 mins
Power Consumption: 65VA
Input: DC 15V/2600mA
Each Chamber can be Partially Skipped

F03002B



Specifications :

Device Size: 23cm*12.5cm*10cm
Massage Mode: 5 modes
Pressure Range: 30 ~ 250 mmHg
Treatment Time: 10~ 60 mins
Input: DC 15V/2600mA/5200mA
Each Chamber can be Partially Skipped

F03002C



Specifications :

Device Size: 27cm*12.5cm*10cm
Massage Mode: 5 modes
Pressure Range: 30 ~ 250 mmHg
Treatment Time: 10~ 60 mins
Input: DC 15V/2600mA/5200mA
Each Chamber can be Partially Skipped

F03002D



Specifications :

Device Size: 26.5cm*12.5cm*9cm
Massage Mode: 5 modes
Pressure Range: 30 ~ 250 mmHg
Treatment Time: 10~ 60 mins
Input: DC 15V/2600mA/5200mA
Each Chamber can be Partially Skipped

CE 0598 FDA



Hand Rehabilitation Device Stroke Patients Finger Recovery Training



F03004



F03004A

Model	F03004/F03004A
Device Size	25cm*12cm*9cm/14.5*12.5*5.5cm
Built-in Battery Volume	2600mAH (7.2V/12V)
Optional Programs	4 modes: A, B, C, D
Pressure Range	100mmHg~180mmHg
5 main functions	Single-finger, multi-finger training function, passive function, mirror function, air wave massage function.

Main Features

- Portable Compact Host Device, Low Mute.
- Multiple Functions: Single-Finger, Multi-Finger Training Function, Passive Function, Mirror Function, Air Wave Massage Function.
- Touch Keypad, Adjustable Treating Time with LED Display, and Available to Toggle Mode.
- The Recovery Glove for Finger Extension and Flexion is a Glove That Imitates the Hand Structure and Fits the Shape of the Hand, Based on The Pneumatic Working Principle, It Helps Hands Grip and Release Exercise.
- Wireless Data Glove Controls The Extension and Flexion of The Other Glove.
- Added Air Wave Massage Function, Built-in Pressure Sensor, Air Pressure Range is 100mmHg-180mmHg.
- Built 2600mA Lithium Battery Allows Longer Working Time, with a maximum use of 4 hours.





CE

0598

MDR

FDA

510(A)

Compressor Nebulizers

- 25mm stamping a with a max temperature of about 180°C, which allows for 2000 hours of non-stop runtime without burning.
- 3 bearings in motor and metallic thermal protector (not disposable plastic type)
- Fire Retardant Material
- **H Class Motor**



Dual Function Compressor Nebulizer
Nebulizer/Suction/Nasal Aspirator



MINI USB Compressor Nebulizer

BC68006-DC

DC Compressor Nebulizer



Device Size:

106mm*79mm*41mm

TECHNICAL FEATURES*

DC Power: 6V/2A
Medication Capacity: 8ml max.
Particle Size: 0.5 to ≤10µm, ≤5µm≥80%
MMAD: 2.9µm
Nebulizing Head Life: ≥500hours
Sound Level: Less than 55dBA
Average Nebulization Rate: 0.2-0.3 ml/min
Operating Pressure Range: ≥16Psi
Liter Flow Range: ≥7 lpm

* Datas variable depending on the medicine used. Data measured through laser diffraction technology using a physiological solution.



BC68006-DC2

DC Compressor Nebulizer



Device Size:

108mm*66mm*43mm

Box Size (mm)	Carton Size(mm)	PCS/CTN	Product Weight
230x115x150	510x256x340	20	0.45KG

BC68006-DC1

DC Compressor Nebulizer
With Li-ion Battery



Device Size:

106mm*100mm*52mm

Box Size (mm)	Carton Size(mm)	PCS/CTN	Product Weight
123x115x150	510x256x320	20	0.55KG

BC68006-DC3

DC Compressor Nebulizer
LED Display 10/20/30mins Setting



Device Size:

106mm*82mm*50mm

Box Size (mm)	Carton Size(mm)	PCS/CTN	Product Weight
230x115x150	510x256x340	20	0.48KG

BC68002 Speed control

NEW



BC68002 series is a high-performance compressor nebulizer with a low noise level and easy to use. The high performance compressor is suitable for continuous use and has a 2000+ hours non-stop service life.

BC68002-C

Compartment Compressor Nebulizer



Package Content

Box Size (mm)	Carton Size (mm)	PCS/CTN	KG/CTN
200x110x340	570x205x640	10	18.0/18.8

20GP	40HQ	Product Weight	Product Size
3800PCS	9120PCS	1.5KG	289/180/107

BC68002

Compartment Compressor Nebulizer



Package Content

Box size (mm)	Carton size (mm)	PCS/CTN	KG/CTN
170x118x275	610x175x575	10	17.8/18.6

20GP	40HQ	Product weight	Product size
4700PCS	11200PCS	1.48KG	248/158/99

HF-BC68002

Compartment Compressor Nebulizer



Package Content

Box Size (mm)	Carton Size (mm)	PCS/CTN	KG/CTN
185x118x300	610x190x620	10	16.1/17.1

20GP	40HQ	Product Weight	Product Size
3960PCS	9500PCS	1.47KG	282/172/106

BC68002E

NEW

Compartment Compressor Nebulizer



Package Content

Box Size (mm)	Carton Size (mm)	PCS/CTN	KG/CTN
280x150x220	580x60x320	8	13.8/18.8

20GP	40HQ	Product Weight	Product Size
218xPCS	6368PCS	1.72KG	220/165/115

BC6403-B

Handle Compressor Nebulizer



Package Content

Box Size (mm)	Carton Size (mm)	PCS/CTN	KG/CTN
175x132x270	548x180x560	8	14.5/15.5

20GP	40HQ	Product Weight	Product Size
5200PCS	12480PCS	1.29KG	154/112/202

BC6403

Handle Compressor Nebulizer



Package Content

Box Size (mm)	Carton Size (mm)	PCS/CTN	KG/CTN
295x140x182	575x300x385	8	12.96/13.56

20GP	40HQ	Product Weight	Product Size
3440PCS	8240PCS	1.34KG	207/170/102

HF-BC68005

Handle Compressor Nebulizer



Package Content

Box Size (mm)	Carton Size (mm)	PCS/CTN	KG/CTN
217x119x258	615x232x536	10	14.1/15

20GP	40HQ	Product Weight	Product Size
3700PCS	9000PCS	1.27KG	188/107/187

BC68001

Compressor Nebulizer



Package Content

Box Size (mm)	Carton Size(mm)	PCS/CTN	KG/CTN
170x115x235	595x175x490	10	14/15

20GP	40HQ	Product Weight	Product Size
5500PCS	13300PCS	1.28KG	155/147/105

BC68001-C

Compressor Nebulizer



Package Content

Box Size (mm)	Carton Size(mm)	PCS/CTN	KG/CTN
175x175x170	545x185x535	9	13/14

20GP	40HQ	Product Weight	Product Size
4761PCS	11430PCS	1.32KG	172/162/98

HF-BC68001

Compressor Nebulizer




Package Content

Box Size (mm)	Carton Size(mm)	PCS/CTN	KG/CTN
175x175x170	540x180x535	9	14.1/15.1

20GP	40HQ	Product Weight	Product Size
4950 PCS	11880 PCS	1.58 KG	160/160/101

BC68001-DC

Compressor Nebulizer



BC68001 series is a high-performance compressor nebulizer with a low noise level and easy to use. The high performance compressor is suitable for continuous use and has a 2000+ hours non-stop service life.

BC68001-E

Compressor Nebulizer



Package Content

Box size (mm)	Carton size(mm)	PCS/CTN	KG/CTN
170x115x235	595x175x490	10	14/15

20GP	40HQ	Product weight	Product size
5500PCS	13300PCS	1.09KG	155/130/86

BC68005

Compressor Nebulizer



Package Content

Box size (mm)	Carton size(mm)	PCS/CTN	KG/CTN
170x115x270	595x175x565	10	14/15

20GP	40HQ	Product weight	Product size
4800PCS	11600PCS	1.25KG	196/160/98

BC68006

Compressor Nebulizer



Package Content

Box Size (mm)	Carton Size(mm)	PCS/CTN	KG/CTN
170x115x235	595x175x490	10	13.5/14.5

20GP	40HQ	Product Weight	Product Size
5500PCS	13300PCS	1.19KG	140/136/97



High-performance compressor nebulizer with a low noise level and easy to use. The high performance compressor is suitable for continuous use and has a 2000+ hours non-stop service life.

TECHNICAL FEATURES*

Input: 220V/50Hz, 120V/60Hz
Power Consumption: ≤65W
Medication Capacity: 8ml
Particle Size: Respirable Fraction 0.5 to 5µm, ≤5µm≥80%
MMAD: 2.9µm
Average Nebulization Rate: 0.2-0.4 ml/min
Noise Level: Below 60dB(A)
Operation Times: Non stop (hospital grade)
Compressor Pressure Range: 30-45 Psi
Operation Pressure Range: 10-14.5 Psi (0.69-1.0 bar)
Liter Flow Range: ≥7 lpm

* Datas variable depending on the medicine used. Data measured through laser diffraction technology using a physiological solution.

Pediatric Nebulizers

BC68005-FS

Fish Compressor Nebulizer



A vivid and colourful fish moulding makes for an eye-catching nebulizer in any pharmacy. Durable and strong shell passed restric drop tests

TECHNICAL FEATURES*

Input: 220V/50Hz, 120V/60Hz
Power Consumption: ≤65W
Medication Capacity: 8ml
Particle Size: Respirable Fraction 0.5 to 5µm, ≤5µm ≥80%
MMAD: 2.9µm
Average Nebulization Rate: 0.2-0.4 ml/min
Noise Level: Below 60dB(A)
Operation Times: Non stop (hospital grade)
Compressor Pressure Range: 30-45 Psi
Operation Pressure Range: 10-14.5 Psi (0.69-1.0 bar)
Liter Flow Range: ≥7 lpm

* Datas variable depending on the medicine used. Data measured through laser diffraction technology using a physiological solution.

Package Content

Box Size (mm)	Carton Size(mm)	PCS/CTN	KG/CTN
275x160x180	660x280x380	8	12.1/12.8

20GP	40HQ	Product Weight	Product Size
3200PCS	7760PCS	1.33KG	247/132/169

BC68005-BK

Basketball Compressor Nebulizer



This nebulizer is loved by children. Give a hug to a nebulizer when atomizing, and it can relieve Children's anxiety, tension and irritability during nebulizing.

Package Content

Box Size (mm)	Carton Size(mm)	PCS/CTN	KG/CTN	20GP	40HQ
200x200x200	615x205x630	9	13.5/14.5	3231PCS	7758PCS

Kit C




6 Animals Kit Easy Fit On All Nebulizer Cups



NEW

BC68005-FT

Football Compressor Nebulizer



All designs can take off and become best-sellers. New creative moulds can be made by our designers at your request.

BC68005-BR1

Bear Compressor Nebulizer



BC68005-MK

Monkey Compressor Nebulizer



BC68005-PG

Piggy Compressor Nebulizer



BC68005-TG

Tiger Compressor Nebulizer



BC68005-PB

Polar Bear Compressor Nebulizer



BC68005-PD

Panda Compressor Nebulizer



Various design options, such as the ones seen above, and others available to request (animals like tigers, koalas, kittens).

Package Content

Box Size (mm)	Carton Size(mm)	PCS/CTN	KG/CTN
180x153x265	630x185x555	8	14.4/15

20GP	40HQ	Product Weight	Product Size
3520PCS	8480PCS	1.36KG	166/140/213

TECHNICAL FEATURES*

Input: 220V/50Hz , 120V/60Hz
Power Consumption: ≤65W
Medication Capacity: 8ml
Particle Size: Respirable Fraction 0.5 to 5µm, ≤5µm ≥80%
MMAD: 2.9µm
Average Nebulization Rate: 0.2-0.4 ml/min
Noise Level: Below 60dB(A)
Operation Times: Non stop (hospital grade)
Compressor Pressure Range: 30-45 Psi
Operation Pressure Range: 10-14.5 Psi (0.69-1.0 bar)
Liter Flow Range: ≥7 lpm

* Datas variable depending on the medicine used. Data measured through laser diffraction technology using a physiological solution.

BC68005-DG

Dog Compressor Nebulizer



Package Content

Box Size (mm)	Carton Size(mm)	PCS/CTN	KG/CTN
220X140X230	450X290X460	8	15.04/15.64
20GP	40HQ	Product Weight	Product Size
3600PCS	8640PCS	1.42KG	205/127/213

BC68005-CT

Cat Compressor Nebulizer



Package Content

Box Size (mm)	Carton Size(mm)	PCS/CTN	KG/CTN
240X150X260	505X475X545	12	20.4/25
20GP	40HQ	Product Weight	Product Size
5256PCS	12600PCS	1.42KG	220/140/230

BC68005-BR2

Bear Nebulizer



Package Content

Box Size (mm)	Carton Size(mm)	PCS/CTN	KG/CTN
205X135X250	560X215X525	8	14.4/15
20GP	40HQ	Product Weight	Product Size
3600PCS	8640PCS	1.42KG	186/125/189

BC68005-QQ


Penguin Compressor Nebulizer



Cute designs for pediatric nebulizers. We have many innovative moulds ODM/OEM welcome. The Penguin design is compact and portable, very popular in the American and European markets. One of Amazon's hot sale items. Carry bag is optional.

Nebulizer Kits

Highly Effective Nebulizer Cup

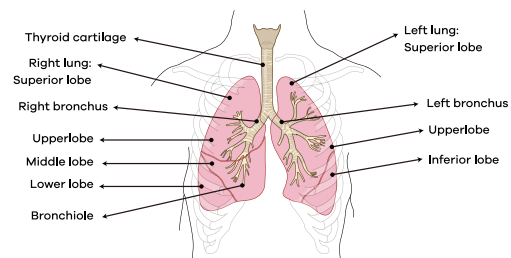

Adjustable air flow speed

Report No.:	GZES230601072301
Mass Median Aerodynamic Diameter (MMAD, μm)	2.700
Geometric Standard Deviation (GSD)	2.431
Respirable fraction, % $< 5 \mu\text{m}$	77.78
% $< 2 \mu\text{m}$	36.89
Test gas employed for a gas-powered nebulizer	By a compressor, model: BC6403
Test solution	albuterol 0.1 % (M/V) concentration in 0.9 % sodium chloride solution
Filling volume (ml)	6 ml


Kit A



20GP/40HQ	Carton Size(mm)	PCS/CTN	KG/CTN
35500/86000	580x380x360	100	10.0/11.0

TECHNICAL FEATURES

- Maximum charge: 8m
- Median diameter (MMD): 2.9 μm
- Percentage of particles smaller than 5 μm : 89%
- Total output >250mg/min
- Residual: <0.6ml

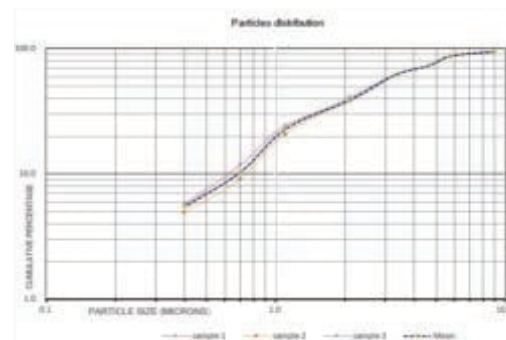

Kit B



20GP/40HQ	Carton Size(mm)	PCS/CTN	KG/CTN
26000/62200	600x400x380	100	10.0/11.7

Compressor Nebulizer/Suction

Highly Effective Nebulizer Motor with 3 Bearings

SPECIFICATIONS

- Rated Current : $\leq 0.7\text{A}$ (when load)
- Rated Power : $\leq 80\text{W}$ (when load)
- NO-load Air Flow : $\geq 8 \text{ L/min}$
- Load Air Flow : when 0.1 MPa (14.5 PSI) $\geq 5 \text{ L/min}$
- Max Pressure : 35 PSI
- Noise : $\leq 60 \text{ dB}$




Compressor Motor



Package content

Qty/Pallet	Pallet Size(mm)	N.W./G.W.
704pcs	1030X990X1030	630/650Kg
20GP	40HQ	Product weight
18240PCS	28160PCS	0.88KG

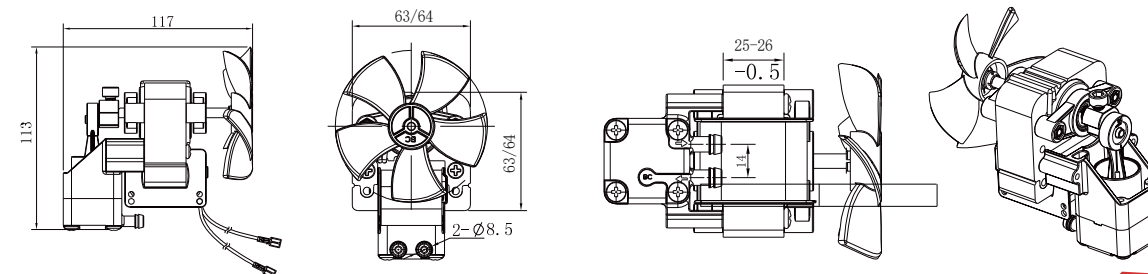

Suction Machine With Battery

WITH RECHARGEABLE BATTERY, ANTI RUSTING STRONG STEEL
LOW NOISE AND LONG LIFE



Oil Free



Low Noise



Suction Bottom
Hidden Inside



Regulated Negative
Pressure

SPECIFICATIONS

- Power Supply:
AC 100V-240V, 50HZ/60HZ; DC 12V 2A
- Input Power: 30VA $\pm$ 25%
- Max Negative Pressure Value: $\geq$ 0.075MPa
- Negative Pressure Adjustment Range:
from 0.02 MPa to 0.075 MPa
- Free Air Flow Rate : $\geq$ 15L / min
- Jug Volume: 1000ml
- Noise Level: $\leq$ 60dBa
- Battery (for DC): 2600mA
- Unit Weight: 1.8KG
- Optionally Equiped with Car Charger



FO9001-D

Phlegm Suction Machine

FO9001-A

Portable Suction Machine



Accessories



Negative Pressure Catheter



Air Filter



Sputum Suction Tube



Fuse Wire

FO9001-E

800ml/1000ml



FO9001-B

Portable Suction Machine



SPECIFICATIONS

- Rated Voltage: AC220V $\pm$ 10%/50Hz $\pm$ 2%
- Input Power: $\leq$ 90w
- Noise: 65 dB(A)
- Max Negative Pressure Value : $\geq$ 0.075MPa
- Pumping Rate: 16-18L/min(40mm moton),
> 20L/min (45mm moton)
- Jug Volume : 1000 ml /800ml
- Continuous Working Time : within 30 min
- Rest Intervals : $\geq$ 30 min
- Portable Design

Package content

	Box Size (mm)	Carton Size (mm)	PCS/CTN	KG/CTN	20GP	40HQ
A	360x190x270	395x372x565	4	14.3/15.1	1360PCS	3300PCS
B	343x160x222	425x397x620	4	14.5/15.5	1080PCS	2600PCS
E	343x160x222	425x397x620	4	14.5/15.5	1080PCS	2600PCS
D	370x185x255	390x390x530	4	15.0	1400PCS	3400PCS

Blood Pressure Monitor Digital Upper Arm BP Monitor

HFA28-1

3.5 inch screen



Cuff : size (22*32cm, 22*42cm)



Large Display



2x99 Memory Storage



Smart Pressure



WHO Standards

SPECIFICATIONS

- Display: LCD Digital Display
- Measurement Method: oscillometric method
- Measuring Range: static pressure 0 ~ 250 mmHg(0~33.33KPa)
- Pulse: 30~200 beats/min, $\pm 5\%$ of reading
- Static Pressure: $\pm 3\text{mmHg}(\pm 0.4\text{KPa})$
- Battery: 1.5V 4 “AA” batteries
- Product Dimension: 135mm*115mm*83mm
- Battery Life: Approx. 300 uses with 4 new alkaline batteries

OPTIONAL

- Backlight: ☐ 3 colors Backlight ☐ ☐ ☐
- ☐ 1 color Backlight ☐ ☐ ☐ ☐
- ☐ No Backlight

Package content

Box size (mm)	Carton size(mm)	Pcs/Ctn	Kgs/Ctn
130x95x174	495x277x365	20	10 7/11 06

